

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

60200871

Customer pos. no.:

Model :

FEKA 300 M-NA 40th - 5m

Pump data

Free passage : 63/64 inch
Aspiration level minimum : 1,49m
Max. immersion depth : 22,966 ft
Min. fluid temperature : 32 °F
Max. fluid temperature : 95 °F

Requested data

Flow :
Head :
Fluid : Water
Fluid Temperature : 68 °F
Density : 62,322 lb/ft³
Kinematic viscosity : 1,0818E-5 ft²/s
Vapor pressure : 0,33938 psi



Hydraulic data (duty point)

Flow :
Head :

Materials

Pump body Technopolymer
Impeller Technopolymer
O-Ring NBR Rubber
Rotor shaft Stainless Steel AISI 431
Suction strainer Technopolymer
Motor top body AISI 304 X5 Cr Ni 1810 UNI 6900/71

Curve tolerance according to ISO 9906

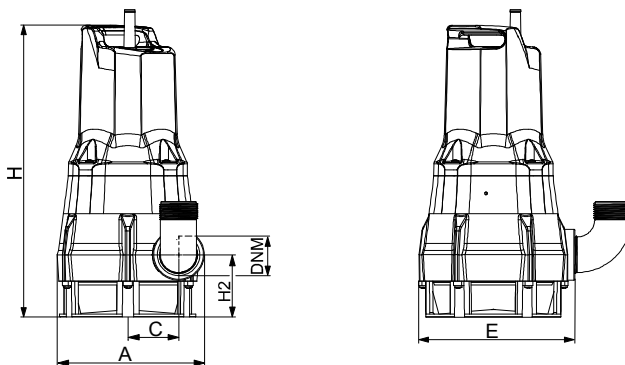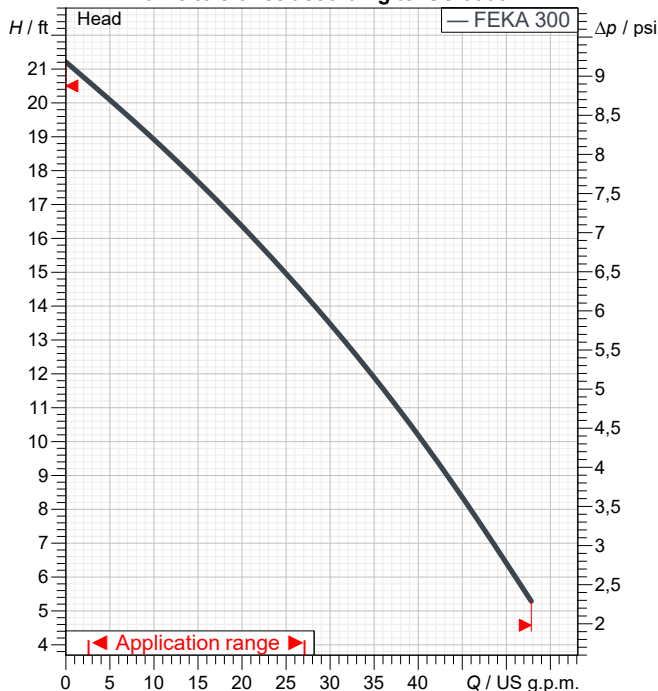

Motor data

Weight : 10,141 lb

Dimensions in inch

A	6 7/16				
C	2 3/16				
DNM	1"1/4 NPT				
E	6 7/8				
H	12 15/16				
H2	2 13/16				

Pump connection

Suction side : /
Discharge side : 1 " 1/4 NPT / --


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

FEKA 300 M-NA 40th - 5m

Curve tolerance according to ISO 9906

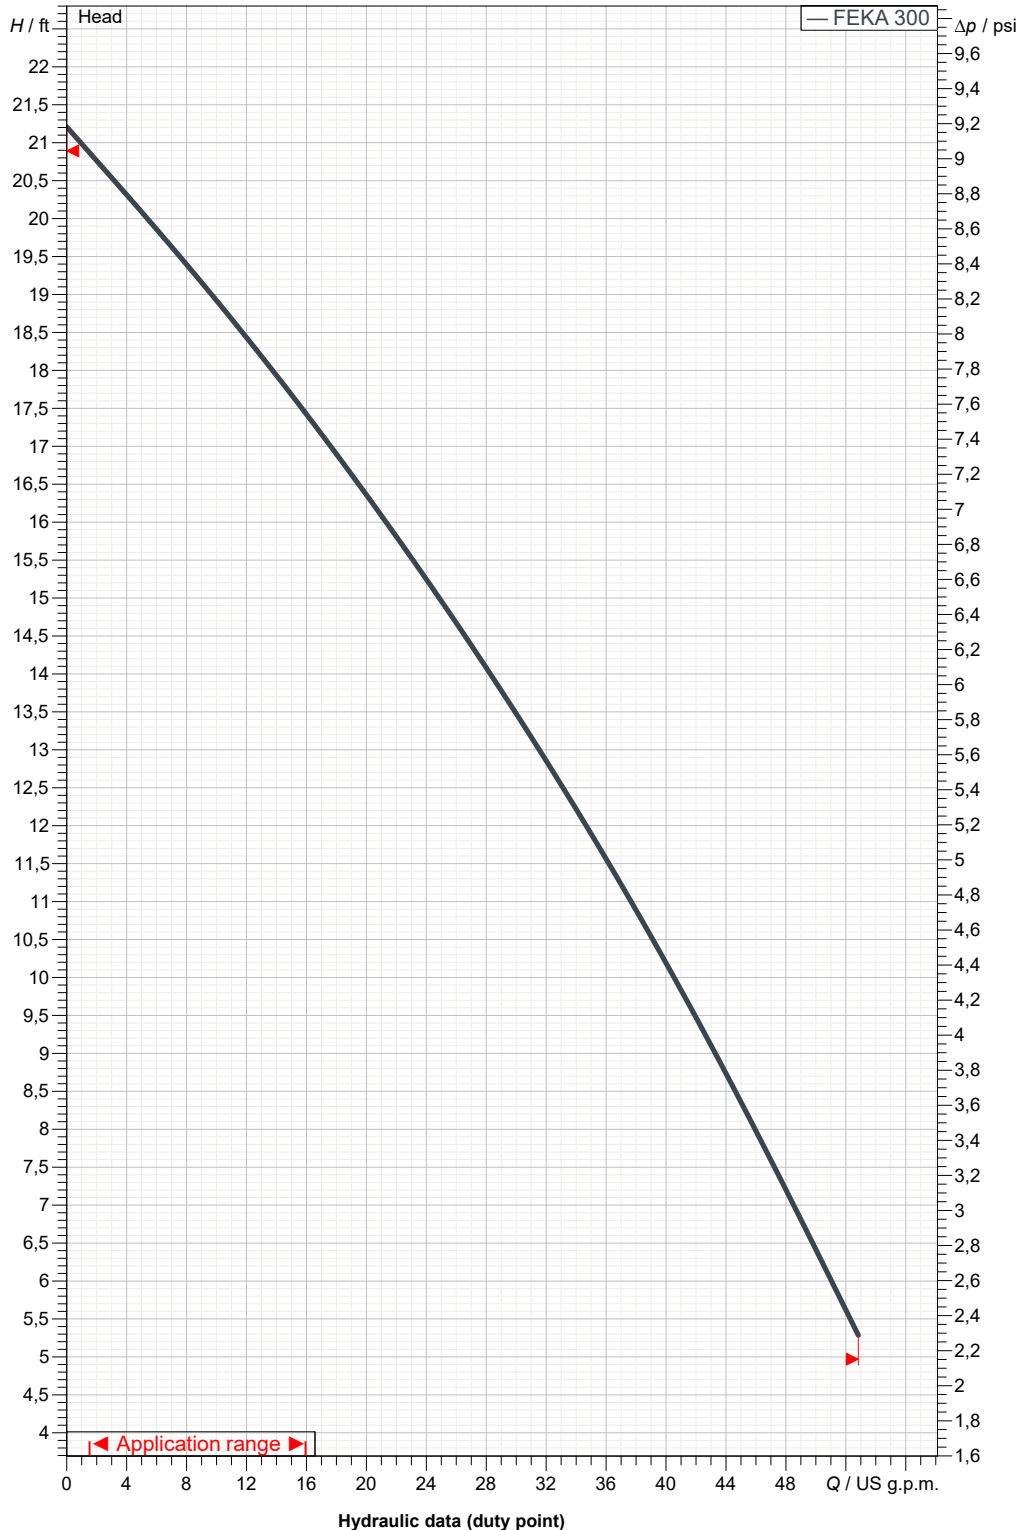

Suction side :

Discharge side :

1 " 1/4 NPT

--

Flow :

Head :

Rated speed :

3.400 rpm

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2023-08-29



DIMENSIONAL DRAWING

2023-08-29

Page 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Ital
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

FEKA 300 M-NA 40th - 5m

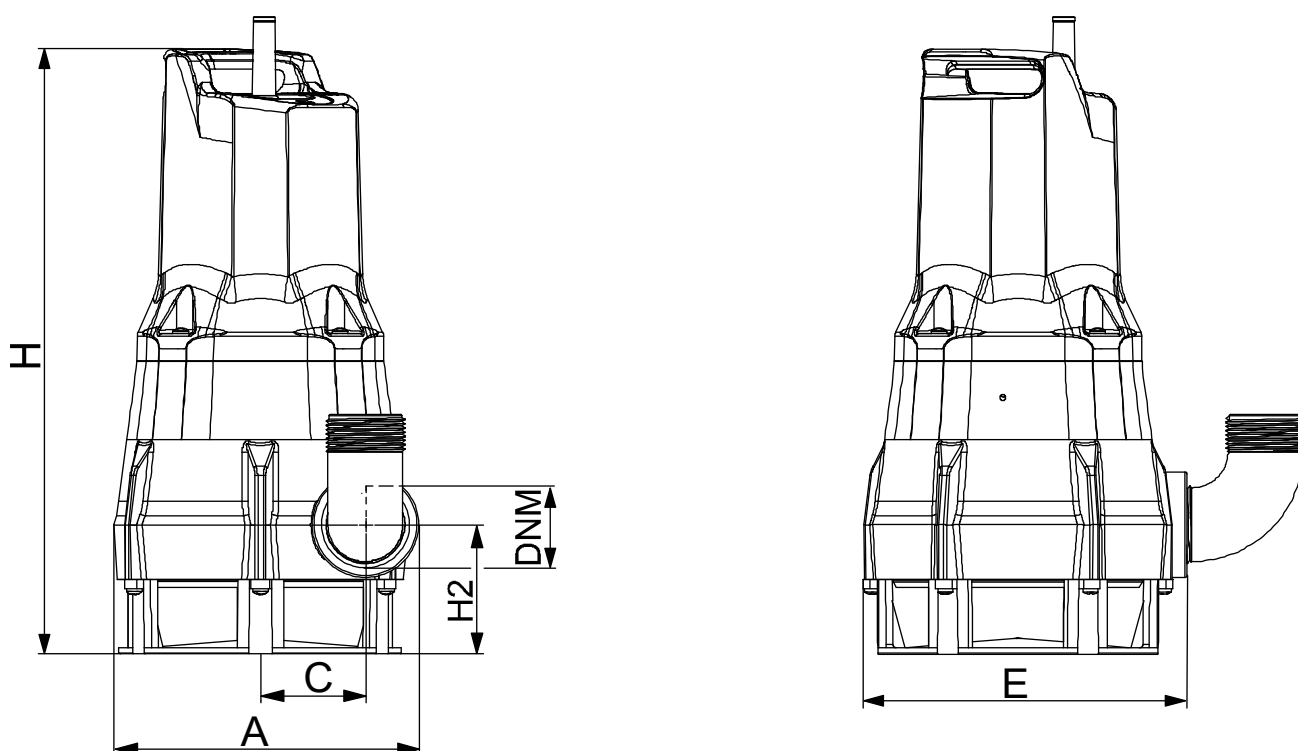

Dimensions in inch

Pump connection

1	A	6 7/16								
2	C	2 3/16								
3	DNM	1"1/4 NPT								Suction
4	E	6 7/8								
5	H	12 15/16								Discharge
6	H2	2 13/16								1 " 1/4 NPT
7										--
8										
9										
10										
11										

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2023-08-29